XS-V1330/V1620

5¼" & 6½" 3-Way Speakers

- 150 W Max Input Power
- 5¼" Highly Oriented Polyolefine Woofer
- 1½" HOP Mid, ½" Dome Tweeter
- Foam Infused Surround
- Strontium Magnets; 2" Depth

- 130 W Max Input Power
- 6½" Highly Oriented Polyolefine Woofer
- 2" Mid, 1" Dome Tweeter
- Foam Surround
- 1¾" Depth, Lo Profile Tweeter

Specifications

Speaker	Coaxial 3-way
	XS-V1330: Woofer 13 cm (5⅛ in.), Highly Oriented Polyolefine cone Midrange: 4 cm (1⅝ in.), Tweeter: 1.1 cm (½ in.), PolyEtherImide (PEI) film dome
	XS-V1620: Woofer 16 cm (6 ⅜ in.), Highly Oriented Polyolefine cone Midrange: 4 cm (1⅝ in.), Tweeter: 1.1 cm (7/16 in.), PolyEtherImide (PEI) film dome
Maximum input power	XS-V1330: 150 watts XS-V1620: 130 watts
Rated input power	XS-V1330: 35 watts XS-V1620: 35 watts
Impedance	4 ohms
Sensitivity	V1330: 90dB / W / m V1620: 91dB / W / m
Frequency response	XS-V1330: 45 - 25,000 Hz XS-V1620: 35 - 27,000 Hz
Crossover frequency	N/A
Mass (per speaker)	XS-V1330: Approx. 700g (1 lb. 9 oz.) XS-V1620: Approx. 820g (1 lb. 13 oz.)

XS-V1330 Dimensions

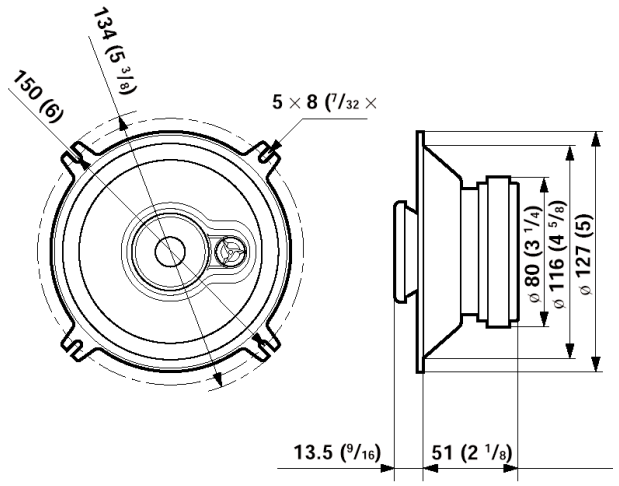

XS-V1620 Dimensions

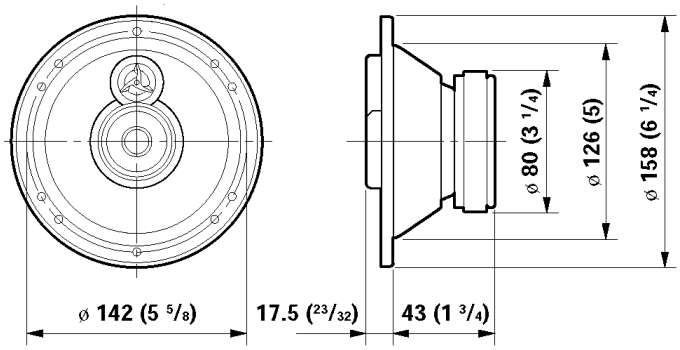

Design and specifications subject to change without notice.